




ITM./ART. 831498
72048

14.6M/48FT/48PI
STRING LIGHTS
GUIRLANDE ÉLECTRIQUE
SERIE DE LUCES

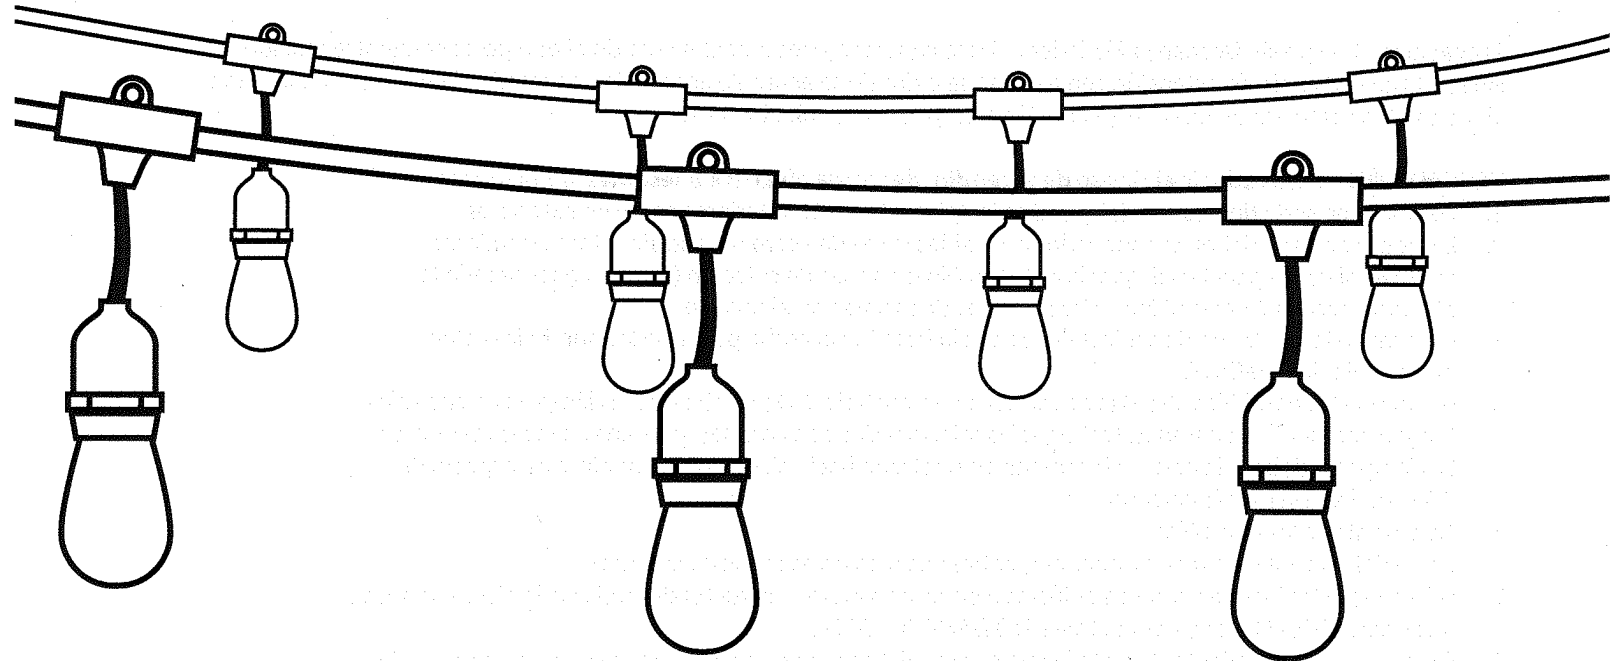

INSTALLATION INSTRUCTIONS
INSTRUCTIONS D'INSTALLATION
INSTRUCCIONES DE INSTALACIÓN





14.6M/48FT/48PI STRING LIGHTS ITM./ART. 831498 72048

INSTALLATION INSTRUCTIONS

IMPORTANT RETAIN FOR FUTURE USE: READ CAREFULLY

WARNING: When using outdoors basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury. Install in accordance with these instructions and current electrical codes such as the National Electric Code (NEC). Note. This product has not been evaluated under section 590 of the NEC.

When used outdoors in Wet Locations, Ground Fault Circuit Interrupter protection (GFCI) is to be provided on the circuits or outlets. Extension cords rated for outdoor use must be used, such as type: SEW, SEOW, SEOOW, SOW, SOOW, STW, STOW, SJEW, SJEOW, SJEOWW, SJW, SJOW, SJOOW, SJTW, SJTOW or SJTOOW. The receptacle cover should always be in place to prevent the entry of water (unless a plug is inserted).

Use only three wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the three prong plug.

Caution: Risk of Electric Shock. Avoid making connections or disconnections when the equipment is wet. Do not use with extension cord near water or where water may accumulate. Do not submerge. Keep lamps at least 4.9m/ 16ft /16pi from pools and spas. Keep receptacles dry.

CAUTION – To reduce the risk of fire, electric shock or injury to persons:

1. Commercial Grade String Light is intended for installation indoor or outdoor.
2. String Lights must be supported by steel guide cables or other suitable supporting hardware such as s-hooks, screw hooks or zip ties (not included) whenever span distances exceed twenty four feet. See Installation Methods on reverse.
3. Light sockets must be installed base up so that bulbs are facing down ONLY.
4. Keep combustible material clear of bulbs. Do NOT allow lamps or sockets to come into contact with walls, ceilings, fabrics associated with shades, blinds or other materials. Lamps should hang freely in a downward direction with a minimum of 3 inch space from the nearest object.
5. Do not cluster the bulbs.
6. Not intended for installation in ceilings, soffits, cabinets or other enclosed spaces.
7. Do NOT secure light string to buildings or other structural supports using nails, staples or other sharp, conducting materials. DO NOT DAMAGE THE WIRE.
8. Avoid damage to the insulation during installation. Do NOT pierce or other wise compromise wire's or socket's outer covering, jacket or sheathing.
9. Periodically inspect wire and sockets for degradation due to weather, UV light or other damage. Promptly replace worn out light string.
10. **DO NOT EXCEED 1440 WATTS, ALL SETS COMBINED. SEE CHART ON REVERSE.**

WARNING: – RISK OF ELECTRIC SHOCK!!

Disconnect power at source prior to wiring, replacing light bulbs or servicing in any way.

1. The light string kits are supplied with an attached three prong plug that will only fit into a three prong outlet. **Do not alter the plug.**


REPLACING LIGHT BULBS

WARNING – RISK OF ELECTRIC SHOCK!! Disconnect power at source prior to replacing light bulbs. For outdoor String Lights, do NOT replace light bulbs during rain or when wet.


1. Replace light bulbs only during dry and calm weather conditions.
2. Unscrew existing bulbs by lightly holding the socket in one hand and twisting the bulb counterclockwise. Bulbs may be tight in the sockets. This is normal to prevent moisture from getting into socket.
3. Replace with medium base light bulbs. Screw bulb into socket clockwise until top of socket forms a tight seal around the light bulb and bulb makes solid contact with socket. **Do not exceed 1440 watts all sets combined. See chart on below.** Suitable for Incandescent, CFL, LED or CCL light bulbs.

INSTALLATION METHODS

1. Using a Guide Wire with S-hooks or zip ties (not included)

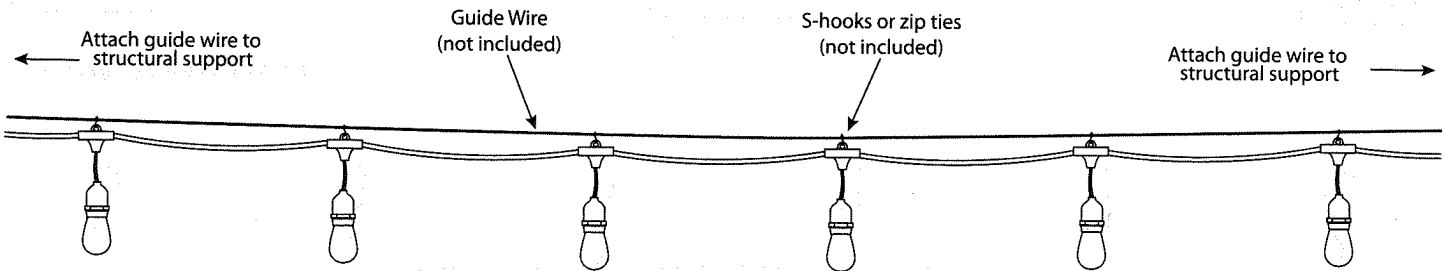

2. Attached to a Structure

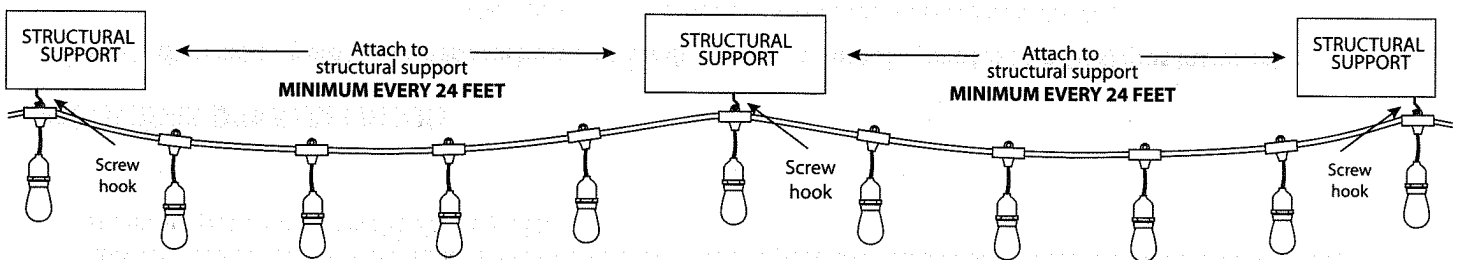

DRAWINGS NOT TO SCALE

| MAXIMUM WATTAGE RANGE | NUMBER OF LIGHT STRINGS |
|-----------------------|-------------------------|
| 7.5 WATT | 8 SETS |
| 8-10 WATT | 6 SETS |
| 11-12 WATT | 5 SETS |
| 13-15 WATT | 4 SETS |
| 16-20 WATT | 3 SETS |
| 21-30 WATT | 2 SETS |
| 31-60 WATT | 1 SET |

**REPLACEMENT
BULBS AVAILABLE AT
COSTCO.COM**



SAVE THESE INSTRUCTIONS